GSTIN-08ABFCS4786A1Z8

CIIF, SCO No. 46, Sector 80, Mohali, Punjab, 140308

ENERGY AUDIT CERTIFICATE

30th MARCH 2024

This is to certify and congratulate St. Xavier's College Jaipur, as it has successfully undergone Energy Audit between December 2023 and March 2024. The compliance of the institution with respective regulations, policies and standards were found satisfactory.



GSTIN-08ABFCS4786A1Z8



CIIF, SCO No. 46, Sector 80, Mohali, Punjab, 140308

Energy Audit Report

St. Xavier's College Jaipur

Nevta-Mahapura Road, Near Nevta Dam, Tehsil Sanganer, Jaipur – 302029, Rajasthan, India



St. Xavier's College Jaipur

Acknowledgement

Sustainergic Tech Pvt. Ltd. is thankful to St. Xavier's College Jaipur for providing us an opportunity

to conduct an Energy Audit of their office, we are grateful to St. Xavier's College Jaipur, other

officers and staff for showing keen interest in the study and for the help and co-operation

extended to EFS team during the study.

We do hope that you will find the recommendations given in this report useful in helping you save

energy. While we have made every attempt to adhere to high quality standards, in both data

collection and analysis, as well as in presentation through the report, we would welcome any

suggestions from your side as to how we can improve further.

Please email at: prateek@sustainergictech.in

Dr. Prateek Srivastava, MD, Sustainergic Tech Pvt. Ltd.

Sustainergic Tech authorized representative for this audit is Mr. Vikrant Pal.

Contents

| 1.0 | Introduction | |
|----------------|---|----|
| 1.1 | Summary of Energy Conservation Measures | 6 |
| 2.0 2.1 | College description and energy sources | |
| Colleg | ge Inspiration | 7 |
| Aim | | 8 |
| The N | Meaning of the College Emblem | 9 |
| 2.2 | Energy Sources and Cost | 9 |
| 2.3 | Electricity | 10 |
| 2.4 | Solar Generation | 12 |
| 3.0 | Energy Conservation Measures | 12 |
| 3.1 | Replace BLDC fans with ceiling fans | 12 |
| 4.0 | Observation and analysis | 13 |
| 4.1 | Electricity supply and Network | 13 |
| 4.2 | List of Electrical Equipment's | 15 |
| 4.3 | Air conditioners | 15 |
| 4.4 | VRV Units | 17 |
| 5.0 | Water Pumps | 18 |
| 5.1 | AHU (Air Handling Unit) | |
| 5.2 | Lighting system | 20 |
| 6.0 | Thermography | 23 |

List of tables

| Table 1. | Summary of Energy Conservation Measures | 6 |
|-----------|--|----|
| Table 2. | Energy cost component of energy sources | 9 |
| Table 3. | Month wise electrical energy consumption 2023-24 | 10 |
| Table 4. | Saving by Ceiling fan replacement with BLDC fan | |
| Table 5. | Electricity bill Analysis 2022-23 | 14 |
| Table 6. | List of Electrical Equipment's | |
| Table 7. | Performance Analysis of AC | |
| Table 8. | Performance Analysis of AC | 16 |
| Table 9. | Performance Analysis of AC | |
| Table 10. | Performance Analysis of AC | 17 |
| Table 11. | Performance Analysis of VRV | 17 |
| Table 12. | Performance Analysis of VRV | 18 |
| Table 13. | Performance Analysis of RO Water Pump | 18 |
| Table 14. | Performance Analysis of Fire Water Pump | 19 |
| Table 15. | Performance Analysis of AHU | 20 |
| Table 16. | Details of LED's installed in college | 20 |
| Table 17. | Details of measured lux in college | |
| | | |

List of Figures

| Figure 1. | Graphical Representation of kWh Consumption | 11 |
|-----------|--|----|
| Figure 2. | Graphical Representation of kVAh Consumption | 11 |
| Figure 3. | Graphical Representation of PF | 11 |
| Figure 4. | Graphical Representation of Net Amount Payable | 12 |

1.0 Introduction

The working details of assignment are as follows:

Project Comprehensive Energy Audit

Client St. Xavier's College Jaipur

College St. Xavier's College Jaipur

Contact Prof. Fr. Xavier Savarimuthu, SJ

Site Nevta-Mahapura Road, Near Nevta Dam, Tehsil Sanganer, Jaipur - 302029

Rajasthan, India

Consultant Engineering College Services

Duration December 2023 – March 2024

Project Scope Examination of detail energy audit in the utility and process to assess the loss in the

system.

Report This document gives recommendations, details of findings and the way forward

Consultants Mr. Deepak Bajpai (EA-19771)

involved Dr. Prateek Srivastava, Mr. Vikrant Pal

Mr. Avinish Kumar Singh

Notes - The critical points are marked in red

- The assumptions are marked in blue

- The suggestions / alternatives in the audit report are based on the present operating conditions of equipment/systems and to the best of our knowledge.

- Investment figures are estimated values and recommended to obtain cost from vendors.

1.1 Summary of Energy Conservation Measures

Table 1. Summary of Energy Conservation Measures

| S. | Energy Conservation Measure | Annual S Electr | _ | Investment | Payback |
|----|--|--------------------|--------------|------------|---------|
| No | znergy conservation incasere | kWh | Rs. Lakhs | Rs. Lakhs | Month |
| | Payback 0-12 mg | onths | | | |
| 1 | Install occupancy sensor in Classroom & Auditorium | | | | |
| 2 | During audit we can found that the college used 2 & 3-star AC which consume more power as compare to 5-star AC's. It is recommended to replace all 5-star ACs with 5 Star inverter AC's. | | | | |
| | Payback 12-24 m | onths | | | |
| 3 | Conventional ceiling fan replacement with BLDC fan It is recommended to replace the ceiling fan with BLDC fan fan 19200 1.7 | | | | 21.2 |
| | Total | 19200 | 1.70 | 3 | 21.2 |

2.0 College description and energy sources

2.1 About St. Xavier's College

The Jaipur Xavier Educational Association (J.X.E.A.) established in 1950, as a registered charitable society managed by the Jesuits, has been pursuing the legacy of St. Francis Xavier of promoting human fulfilment by means of training and education in India. Following the motto of the founder of the Society of Jesus, St. Ignatius of Loyola, the college has been working for "The Greater Glory of God" (*Ad Majorem Dei Gloriam*).

In 2006, Xavier Vocational Institute (X.V.I.) was set up in Jaipur to give vocational training to the weaker sections of the society. In 2010, J.X.E.A. in collaboration with Xavier Alumni/ae and well-wishers of Jaipur under the leadership of Rev. Fr. Varkey Perekkatt, SJ, established St. Xavier's College Jaipur. Since then, the college has grown manifold, serving the educational needs, not only of the people of Jaipur but also of the nation. Over the last 10 years we have grown from a sapling to a huge oak, as every year the college has reached new milestones. In 2014, the college was declared a Christian Minority Jesuit Institution and in the same year, the status of college was elevated to the Postgraduate the level with the initiation of two courses, namely, Masters in English Literature and Human Resource Management. In the year 2017, the college was granted Permanent Affiliation for B.A. Honours in Economics and English Literature from the University of Rajasthan. The following year was a testament to our success as the student strength crossed over 2000, and the number of undergraduate courses rose to six - B.A.(Honours)- English, Economics, Political Science; BBA, BCA and B.Com. and the number of postgraduate programmes turned to 5 - M.A.(English), M.A.(Economics), M.Sc. (IT), M.Com.(EAFM, ABST) and M.H.R.M. Another achievement followed in 2019 when the college got recognition under section 2(f) and 12(B) of UGC Act 1956. In addition to this, in the same year, all the undergraduate departments along with M.A. English Literature got permanent affiliation from the University of Rajasthan, Jaipur (Rajasthan). After a magnificent decade, right in the heart of the city, the college shifted to the new campus at Nevta, Jaipur in the session 2021-22 to provide bigger and better infrastructural and academic possibilities to the students. In 2022- 23, Professional Programmes – MBA and MCA have been introduced by the college through its New Technical Institution - Xavier Institute of Management and Informatics (XIMI) in the same Campus. The Department of English and Business Administration have also been approved as Research Centres for PhD Programme.

College Inspiration

The education offered at St. Xavier's College Jaipur aspires to reach the lofty ideals of St. Ignatius that are encapsulated in the *Magis*, meaning "better than the best". Every activity of the College is in line with the definite stand taken by the Society of Jesus with regard to this ideal in the field of education, all over the world. This stand is inspired and moulded by a document on Jesuit education prepared in 1986, on the occasion of the 400th anniversary of Ratio Studiorum (Plan of studies drawn up by the Jesuits when they entered into the field of education), by the International Commission on the Apostolate of Jesuit Education (ICAJE) and presented to the whole Society by the then General Fr. Peter Hans Kolvenbach, SJ.

The document confers on Jesuit education the following characteristics:

Person Oriented: by paying individual attention to each student and making teaching and learning

student-centered.

Integral Formation and Development: by paying special attention to intellectual, effective, imaginative,

aesthetic, creative, critical, communicative, physical, cultural, moral, and spiritual aspects of the

individual.

Faith in God and Religious Experience: by promoting well-formed and strongly-held beliefs in one's faith,

tradition and deepening one's relationship with God.

Value-based Leadership: by ensuring a consistent focus on personal integrity and ethical behaviour in all

professions, and the appropriate balance between justice and fairness.

Commitment to Excellence: by practically applying well-learned lessons and skills to achieve new ideas,

better solutions and vital answers.

Relevant to the Times: by adapting to the concrete situations, politically, socially, and culturally.

Service that Promotes Justice: by using learning and leadership in open- handed and generous ways to

ensure freedom of inquiry, the pursuit of truth, and care for others.

Participative: by encouraging interaction among the pupil, parents, and teachers.

Aim

Like other Jesuit educational institutions, St. Xavier's College Jaipur aims to train young men and women

who would contribute to the society as creative leaders and responsible citizens, committed to the service

of the people. Every effort is made to see that the students become intellectually equipped, morally

upright, socially committed, and spiritually awakened to God's uniting presence in the whole world. The

Christian doctrine of love and service well paraphrased by Christ in 'love thy neighbour as thyself' provides

the bedrock of education that is offered here, and illuminates and directs all our activities and projects.

St Xavier's College Jaipur

8

The Meaning of the College Emblem

The motto on the college crest: Competence, Character and Compassion encodes the core values sought by the college, and challenges every student who passes through the portals of St. Xavier's College Jaipur is expected to imbibe the high ideals of the college: acquiring personal integrity and excellence in everything.

The burning lamp represents Lord Jesus Christ who said, "I am the light of the world" (John 8:12), and the Wisdom of God. True education leads one from the darkness of ignorance to the light of genuine knowledge and enlightenment.

The open book symbolizes the time tested, quality educational tradition of the Jesuits and their commitment to carry it forward. The inscription "IHS," placed above the open book is taken from the official seal of the Society of Jesus, used by the founder St. Ignatius of Loyola. These are the first three letters of the Latinized Greek word HISOVS, meaning 'Jesus'. The cross shown above the letter 'H' reminds the world that Jesus Christ died on the Cross for the salvation of mankind.

The peacock is the national bird of India. It symbolizes beauty, grace, and pride in the nation, its natural resources and cultural diversity. It inspires a sense of mysticism encouraging us to aim for higher values.

2.2 Energy Sources and Cost

Electricity & Fuel (Diesel) are major energy sources of the College. Electricity is supplied at 11 kV. There are one 1000KVA, 11/0.40 kV LT distribution transformers to cater electricity demand to cater electricity demand. Capacity of DG set is 500 KVA.

The energy cost from various sources of energy is given below:

Table 2. Energy cost component of energy sources

| Source of energy | Unit | Cost | |
|--------------------|----------|------|--|
| Electricity (Grid) | Rs. /kWh | 8.50 | |

2.3 Electricity

The energy demand of the College is fulfilled by the electricity from Grid. The annual energy consumption from electricity grid sources is as follows:

Table 3. Month wise electrical energy consumption 2023-24

| DETAILS OF ELECTRICITY CONSUMPTION FOR THE 2023-2024 | | | | | | | | | |
|--|-----------------|---------------------|-----------------|----------------------------|-------|-----------------------------|-----------|-----------------------------------|--|
| монтн | kWh CONSUMPTION | KVAH CONSUMPTION | FIXED CHARGE | ENERGY CHARGES (INR) | PF | CONTRACT DEMAND (KVA) | MDI (KVA) | NET AMOUNT PAYABLE (INR) | |
| Apr-23 | 27831.0 | 32780.9 | 81000 | 246304 | 0.849 | 400 | 300 | 363063 | |
| May-23 | 42043.0 | 46405.1 | 92262 | 372080 | 0.906 | 400 | 341.6 | 585913 | |
| Jun-23 | 7397.0 | 8005.4 | 81000 | 65053 | 0.924 | 400 | 300 | 248773 | |
| Jul-23 | 12170.0 | 14470.9 | 81000 | 107705 | 0.841 | 400 | 300 | 243000 | |
| Aug-23 | 54477.0 | 59343.1 | 130734 | 482121 | 0.918 | 400 | 484 | 828063 | |
| Sep-23 | 74764.0 | 80047.1 | 133380 | 661661 | 0.934 | 400 | 494 | 1085745 | |
| Oct-23 | 56846.0 | 62126.8 | 172962 | 503091 | 0.915 | 400 | 641 | 1178752 | |
| Nov-23 | 12272.5 | 14575.4 | 81000 | 108611 | 0.842 | 400 | 300 | 234679 | |
| Dec-23 | 10876.0 | 14124.7 | 81000 | 96252 | 0.770 | 400 | 300 | 221300 | |
| Jan-24 | 4298.0 | 5808.1 | 81000 | 38037 | 0.740 | 400 | 300 | 151287 | |
| Feb-24 | 6523.0 | 8449.5 | 81000 | 57728 | 0.772 | 400 | 300 | 175184 | |
| Mar-24 | 779.0 | 1018.3 | 81000 | 6894 | 0.765 | 400 | 300 | 113420 | |
| Avg | 25856.4 | 28929.6 | 98111.5 | 228794.7 | 0.848 | 400 | 363 | 452432 | |
| Max | 74764.0 | 80047.1 | 172962.0 | 661661.0 | 0.934 | 400.0 | 640.6 | 1178752 | |
| Min | 779.0 | 1018.3 | 81000.0 | 6894.0 | 0.740 | 400.0 | 300.0 | 113420 | |

St. Xavier College Jaipur

Figure 1. Graphical Representation of kWh Consumption

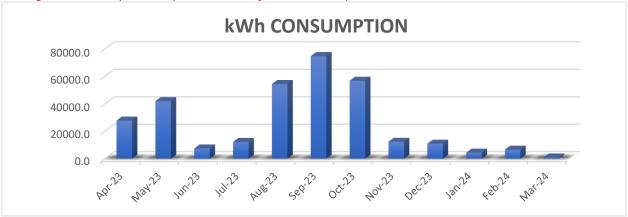
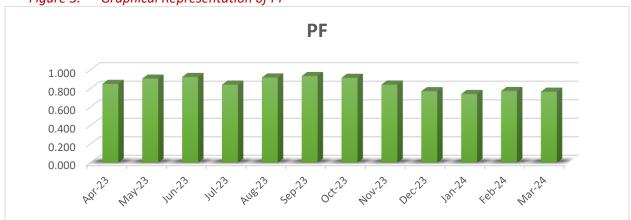


Figure 2. Graphical Representation of kVAh Consumption



Figure 3. Graphical Representation of PF



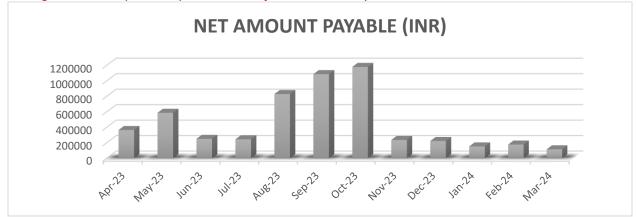


Figure 4. Graphical Representation of Net Amount Payable

2.4 Solar Generation

Details of renewable energy generation projects on organization's property for organization's

The college, situated in Jaipur, has successfully implemented a sustainable initiative with a 300-kW solar rooftop power plant. Operating hits maximum capacity, the campus optimally utilizes clean solar energy, emphasizing environmental responsibility and minimizing carbon footprints. In comparison to traditional methods, where 01unit of electricity production consumes 0.69-0.89 kg of coal and emits 02kg of CO₂, this solar facility significantly reduces pollution. With a total of 560 panels, the college's commitment to eco-friendly practices extends to Operations and Maintenance (O & M) services, ensuring the ongoing efficiency and longevity of this green energy solution.

3.0 Energy Conservation Measures

3.1 Replace BLDC fans with ceiling fans

Background

During energy audit we found that the college uses 60 kW ceiling fans.

Findings

We found that the ceiling fan which is of 60 kW consume more power.

Recommendations

It is recommended to replace the plant ceiling fan with BLDC fan immediately and plan to replace the 100 fans with BLDC fan in first phase.

Benefits

We can replace the existing ceiling fans with the energy efficient BLDC fans. Savings should be taken as when the fan is needed to be changed as when they get faulty. Saving calculation given below.

Table 4. Saving by Ceiling fan replacement with BLDC fan

| Parameter | Unit | Value |
|--|---------|--------|
| Average power consumption of the ceiling fan at present | Watt | 60 |
| Average power consumption of energy efficient star rated (BLDC) fans | Watt | 28 |
| Equivalent Power saving per fan | Watt | 32 |
| Numbers of fans to be replaced | Nos | 100 |
| Working Hours Per annum | Hr | 6000 |
| Overall electric Power Cost | Rs/kWh | 8.85 |
| Annual Energy Saving | kWh | 19200 |
| Monetary saving | Rs/Year | 169920 |
| Investment | Rs | 300000 |
| Payback | Month | 21 |

4.0 Observation and analysis

4.1 Electricity supply and Network

Electricity & Fuel (Diesel) are major energy sources of the College. Electricity is supplied at 11 kV. There are one 1000KVA, 11/0.40 kV LT distribution transformers to cater electricity demand to cater electricity demand. Capacity of DG set is 500 KVA.

4.1.1 Energy bill Analysis

Table 5. Electricity bill Analysis 2023-24

| DETAILS OF ELECTRICITY CONSUMPTION FOR THE 2023-2024 | | | | | | | | | | |
|--|-----------------|---------------------|-----------------|----------------------------|-------|-----------------------------|-----------|--------------------------------|--|--|
| монтн | kWh CONSUMPTION | KVAH CONSUMPTION | FIXED CHARGE | ENERGY CHARGES (INR) | PF | CONTRACT DEMAND (KVA) | MDI (KVA) | NET AMOUNT PAYABLE (INR) | | |
| Apr-23 | 27831.0 | 32780.9 | 81000 | 246304 | 0.849 | 400 | 300 | 363063 | | |
| May-23 | 42043.0 | 46405.1 | 92262 | 372080 | 0.906 | 400 | 341.6 | 585913 | | |
| Jun-23 | 7397.0 | 8005.4 | 81000 | 65053 | 0.924 | 400 | 300 | 248773 | | |
| Jul-23 | 12170.0 | 14470.9 | 81000 | 107705 | 0.841 | 400 | 300 | 243000 | | |
| Aug-23 | 54477.0 | 59343.1 | 130734 | 482121 | 0.918 | 400 | 484 | 828063 | | |
| Sep-23 | 74764.0 | 80047.1 | 133380 | 661661 | 0.934 | 400 | 494 | 1085745 | | |
| Oct-23 | 56846.0 | 62126.8 | 172962 | 503091 | 0.915 | 400 | 641 | 1178752 | | |
| Nov-23 | 12272.5 | 14575.4 | 81000 | 108611 | 0.842 | 400 | 300 | 234679 | | |
| Dec-23 | 10876.0 | 14124.7 | 81000 | 96252 | 0.770 | 400 | 300 | 221300 | | |
| Jan-24 | 4298.0 | 5808.1 | 81000 | 38037 | 0.740 | 400 | 300 | 151287 | | |
| Feb-24 | 6523.0 | 8449.5 | 81000 | 57728 | 0.772 | 400 | 300 | 175184 | | |
| Mar-24 | 779.0 | 1018.3 | 81000 | 6894 | 0.765 | 400 | 300 | 113420 | | |
| Avg | 25856.4 | 28929.6 | 98111.5 | 228794.7 | 0.848 | 400 | 363 | 452432 | | |
| Max | 74764.0 | 80047.1 | 172962.0 | 661661.0 | 0.934 | 400.0 | 640.6 | 1178752 | | |
| Min | 779.0 | 1018.3 | 81000.0 | 6894.0 | 0.740 | 400.0 | 300.0 | 113420 | | |

Observation:

• The maximum Energy consumption in Sep- 23 was 74764.0 kWh and minimum Energy consumption was 779 kWh in Mar-24.

4.2 List of Electrical Equipment's

Table 6. List of Electrical Equipment's

| List of Electrical Equipment's | | | | | | | |
|--------------------------------|----------------|-----|-----|--|--|--|--|
| S NO. | Equipment's | UOM | Qty | | | | |
| 1 | Computers | Nos | 366 | | | | |
| 2 | Projectors LCD | Nos | 58 | | | | |
| 3 | Online UPS | Nos | 8 | | | | |
| 4 | Ceiling Fans | Nos | 640 | | | | |

4.3 Air conditioners

The College has installed AC for College. The analysis was done to identify the measures that could be undertaken to reduce the energy consumption. The following parameter has studied in each unit.

- Air flow rate
- Air flow cross section area
- Return dry bulb temperature
- Return wet bulb temperature
- Power consumption
- Supply dry bulb temperature
- Supply wet bulb temperature

All AC with two/tree star rating (BEE) are installed in college.

Table 7. Performance Analysis of AC

| Parameters | Units | | ST. XA | VIER'S COLLEGE | JAIPUR | |
|---------------------------|---------|------------|------------|----------------|--------------|-------------|
| Location | | Room No-40 | Room No-41 | Waiting Area | Waiting Area | Server Room |
| Design Capacity | TR | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |
| Total Area | m² | 0.085 | 0.085 | 0.085 | 0.085 | 0.085 |
| Measured avg. Velocity | m/s | 2.01 | 1.9 | 1.9 | 1.98 | 2.12 |
| Calculated Flow | m³/hr | 615.1 | 581.4 | 581.4 | 605.9 | 648.7 |
| Supply Air Dry Bulb Temp. | οС | 25 | 23 | 26 | 26 | 24 |
| Supply Air Wet Bulb Temp. | °C | 17 | 17 | 17 | 18 | 19 |
| Enthalpy supply air | KCal/Kg | 11.4 | 11.4 | 11.4 | 12.1 | 12.9 |
| Return Air Dry Bulb Temp. | °C | 27 | 27 | 29 | 28 | 29 |
| Return Air Wet Bulb Temp. | °C | 24 | 24 | 24 | 24 | 25 |
| Enthalpy return air | KCal/Kg | 17.22 | 17.3 | 17.22 | 17.21 | 18.19 |
| Density of Air | kg/m³ | 1.225 | 1.225 | 1.225 | 1.225 | 1.225 |
| Calculated Capacity | TR | 1.46 | 1.39 | 1.38 | 1.25 | 1.40 |
| Power Consumption | kW | 2.1 | 2 | 2.1 | 2 | 2.3 |
| kW/TR | | 1.441 | 1.434 | 1.522 | 1.595 | 1.648 |
| EER | | 8.329 | 8.366 | 7.887 | 7.525 | 7.280 |

| Parameters | Units | ST. XAVIER'S COLLEGE JAIPUR | | | | | |
|------------|-------|-----------------------------|-------|-------|-------|-------|--|
| СОР | | 2.439 | 2.450 | 2.309 | 2.204 | 2.132 | |

Observation: AC performance found is satisfactory.

Table 8. Performance Analysis of AC

| Parameters | Units | ST. XAVIER'S COLLEGE JAIPUR | | | | | |
|---------------------------|---------|-----------------------------|--------|--------|---------------|---------------|--|
| Location | | Room No-11 | Chapal | Chapal | Hostel Room-1 | Hostel Room-1 | |
| Design Capacity | TR | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | |
| Total Area | m² | 0.085 | 0.085 | 0.085 | 0.085 | 0.085 | |
| Measured avg. Velocity | m/s | 2.12 | 2.21 | 2.35 | 2.12 | 2.09 | |
| Calculated Flow | m³/hr | 648.7 | 676.3 | 719.1 | 648.7 | 639.5 | |
| Supply Air Dry Bulb Temp. | °C | 23 | 24 | 26 | 26 | 25 | |
| Supply Air Wet Bulb Temp. | °C | 17 | 18 | 18 | 17 | 19 | |
| Enthalpy supply air | KCal/Kg | 11.4 | 12.1 | 12.1 | 11.4 | 13.7 | |
| Return Air Dry Bulb Temp. | °C | 28 | 27 | 29 | 29 | 29 | |
| Return Air Wet Bulb Temp. | °C | 24 | 24 | 24 | 24 | 26 | |
| Enthalpy return air | KCal/Kg | 17.21 | 17.3 | 17.2 | 17.2 | 19.22 | |
| Density of Air | kg/m³ | 1.225 | 1.225 | 1.225 | 1.225 | 1.225 | |
| Calculated Capacity | TR | 1.53 | 1.42 | 1.49 | 1.52 | 1.44 | |
| Power Consumption | kW | 2.2 | 2.2 | 2.3 | 2.2 | 2.23 | |
| kW/TR | | 1.441 | 1.547 | 1.548 | 1.443 | 1.554 | |
| EER | | 8.328 | 7.755 | 7.751 | 8.314 | 7.723 | |
| СОР | | 2.439 | 2.271 | 2.270 | 2.434 | 2.262 | |

[•] Observation: AC performance found is satisfactory.

Table 9. Performance Analysis of AC

| Parameters | Units | ST. XAVIER'S COLLEGE JAIPUR | | | | | |
|------------------------------|----------------|-----------------------------|--------------|--------------|--------------|--------|--|
| Location | | Hostel Room- | Hostel Room- | Hostel Room- | Hostel Room- | Warden | |
| Location | | 2 | 2 | 3 | 3 | Room | |
| Design Capacity | TR | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | |
| Total Area | m ² | 0.085 | 0.085 | 0.085 | 0.085 | 0.085 | |
| Measured avg. Velocity | m/s | 2 | 1.9 | 2.2 | 2.7 | 2.1 | |
| Calculated Flow | m³/hr | 612.0 | 581.4 | 673.2 | 826.2 | 642.6 | |
| Supply Air Dry Bulb Temp. | °C | 26 | 23 | 28 | 24 | 27 | |
| Supply Air Wet Bulb Temp. | °C | 18 | 17 | 19 | 19 | 18 | |
| Enthalpy supply air | KCal/K g | 12.1 | 11.4 | 12.9 | 12.9 | 12.1 | |
| Return Air Dry Bulb Temp. | οС | 29 | 27 | 30 | 29 | 29 | |
| Return Air Wet Bulb Temp. | °C | 24 | 24 | 25 | 25 | 24 | |
| Enthalpy return air | KCal/K g | 17.21 | 17.3 | 18.18 | 18.19 | 17.21 | |
| Density of Air | kg/m³ | 1.225 | 1.225 | 1.225 | 1.225 | 1.225 | |
| Calculated Capacity | TR | 1.27 | 1.39 | 1.45 | 1.77 | 1.33 | |
| Power Consumption | kW | 2.1 | 2.2 | 2.25 | 2.98 | 2.23 | |
| kW/TR | | 1.658 | 1.578 | 1.548 | 1.683 | 1.673 | |
| EER | - | 7.239 | 7.605 | 7.752 | 7.130 | 7.172 | |
| СОР | | 2.120 | 2.227 | 2.270 | 2.088 | 2.100 | |

Observation: AC performance found is satisfactory.

Table 10. Performance Analysis of AC

| Parameters | Units | ST. XAVIER'S COLLEGE JAIPUR | | | | | |
|------------------------------|----------------|-----------------------------|--------|-------|----------------|--------------|--|
| Location | | Room No- | Server | Studi | Computer Staff | Audi Control | |
| Location | | 10 | Room | 0 | Room | Room | |
| Design Capacity | TR | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | |
| Total Area | m ² | 0.085 | 0.085 | 0.085 | 0.085 | 0.085 | |
| Measured avg. Velocity | m/s | 2.1 | 2.65 | 2.23 | 2.25 | 1.9 | |
| Calculated Flow | m³/hr | 642.6 | 810.9 | 682.4 | 688.5 | 581.4 | |
| Supply Air Dry Bulb Temp. | °C | 24 | 27 | 25 | 28 | 23 | |
| Supply Air Wet Bulb Temp. | °C | 16 | 21 | 17 | 19 | 17 | |
| Enthalpy supply air | KCal/K g | 10.7 | 14.5 | 11.4 | 12.9 | 11.4 | |
| Return Air Dry Bulb Temp. | oC | 29 | 29 | 29 | 30 | 27 | |
| Return Air Wet Bulb Temp. | °C | 23 | 26 | 24 | 25 | 24 | |
| Enthalpy return air | KCal/K g | 16.25 | 19.22 | 17.2 | 18.18 | 17.3 | |
| Density of Air | kg/m³ | 1.225 | 1.225 | 1.225 | 1.225 | 1.225 | |
| Calculated Capacity | TR | 1.46 | 1.55 | 1.61 | 1.49 | 1.39 | |
| Power Consumption | kW | 2.42 | 2.35 | 2.32 | 2.33 | 2.35 | |
| kW/TR | | 1.663 | 1.516 | 1.440 | 1.567 | 1.685 | |
| EER | | 7.216 | 7.917 | 8.336 | 7.656 | 7.120 | |
| СОР | | 2.113 | 2.318 | 2.441 | 2.242 | 2.085 | |

Observation: AC performance found is satisfactory.

4.4 VRV Units

Performance analysis of VRV outdoor units of college

The College has installed 14 nos VRV Outdoor units which provide for comfort condition of the college. The performance analysis of the VRV ODU was carried out.

Table 11. Performance Analysis of VRV

| Parameters | Units | ST. XAVIER'S COLLEGE JAIPUR | | | | | | |
|------------------------------|-------------|-----------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Location | | First Floor | Second Floor | Second Floor | Second Floor | Fourth Floor | Ground Floor | Ground Floor |
| Total Area | m² | 0.384 | 0.384 | 0.384 | 0.384 | 0.384 | 0.384 | 0.384 |
| Measured avg. Velocity | m/s | 12.8 | 12.9 | 12.89 | 13.8 | 14.3 | 12.5 | 12.2 |
| Calculated Flow | m³/hr | 17694.7 | 17833.0 | 17819.1 | 19077.1 | 19768.3 | 17280.0 | 16865.3 |
| Supply Air Dry Bulb Temp. | °C | 35 | 35 | 35 | 35 | 35 | 35 | 35 |
| Supply Air Wet Bulb Temp. | °C | 22 | 22 | 22 | 22 | 22 | 22 | 22 |
| Enthalpy supply air | KCal/ Kg | 16.0 | 16.0 | 16.0 | 16.0 | 16.0 | 16.0 | 16.0 |
| Return Air Dry Bulb Temp. | °C | 40 | 40 | 40 | 40 | 40 | 40 | 40 |
| Return Air Wet Bulb Temp. | °C | 24 | 24 | 24 | 24 | 24 | 24 | 24 |
| Enthalpy return air | KCal/ Kg | 17.88 | 17.88 | 17.88 | 17.88 | 17.88 | 17.88 | 17.88 |
| Density of Air | kg/m³ | 1.225 | 1.225 | 1.225 | 1.225 | 1.225 | 1.225 | 1.225 |

| Parameters | Units | | ST. XAVIER'S COLLEGE JAIPUR | | | | | |
|---------------------|-------|--------|-----------------------------|--------|--------|--------|--------|--------|
| Calculated Capacity | TR | 13.62 | 13.73 | 13.71 | 14.68 | 15.22 | 13.30 | 12.98 |
| Power Consumption | kW | 13.4 | 13.2 | 12.75 | 13.7 | 15.1 | 12.76 | 11.89 |
| kW/TR | | 0.984 | 0.962 | 0.930 | 0.933 | 0.992 | 0.959 | 0.916 |
| EER | | 12.196 | 12.478 | 12.908 | 12.861 | 12.092 | 12.508 | 13.101 |
| СОР | | 3.571 | 3.654 | 3.780 | 3.766 | 3.541 | 3.663 | 3.836 |

• VRV performance found satisfactory

Table 12. Performance Analysis of VRV

| Parameters | Units | ST. XAVIER'S COLLEGE JAIPUR | | | | | | |
|------------------------------|-------------|-----------------------------|---------------|----------------|----------------|-----------------------|-----------------------|--------------|
| Location | | Office VRV | Office VRV | Auditori um | Auditori um | Auditorium Balcony | Auditorium Balcony | XIMI Area |
| Total Area | m² | 0.384 | 0.384 | 0.384 | 0.384 | 0.384 | 0.384 | 0.384 |
| Measured avg. Velocity | m/s | 12.8 | 12.6 | 12 | 12.2 | 10 | 11.4 | 12.2 |
| Calculated Flow | m³/hr | 17694.7 | 17418.2 | 16588.8 | 16865.3 | 13824.0 | 15759.4 | 16865. 3 |
| Supply Air Dry Bulb Temp. | °C | 35 | 35 | 35 | 35 | 35 | 35 | 35 |
| Supply Air Wet Bulb Temp. | °C | 22 | 22 | 22 | 22 | 22 | 22 | 22 |
| Enthalpy supply air | KCal/ Kg | 16.0 | 16.0 | 16.0 | 16.0 | 16.0 | 16.0 | 16.0 |
| Return Air Dry Bulb Temp. | °C | 40 | 40 | 40 | 40 | 40 | 40 | 40 |
| Return Air Wet Bulb Temp. | °C | 24 | 24 | 24 | 24 | 24 | 24 | 24 |
| Enthalpy return air | KCal/ Kg | 17.88 | 17.88 | 17.88 | 17.88 | 17.88 | 17.88 | 17.88 |
| Density of Air | kg/m | 1.225 | 1.225 | 1.225 | 1.225 | 1.225 | 1.225 | 1.225 |
| Calculated Capacity | TR | 13.62 | 13.41 | 12.77 | 12.98 | 10.64 | 12.13 | 12.98 |
| Power Consumption | kW | 12.62 | 12.68 | 12.01 | 11.8 | 9.76 | 11.3 | 11.8 |
| kW/TR | | 0.927 | 0.946 | 0.941 | 0.909 | 0.917 | 0.932 | 0.909 |
| EER | | 12.950 | 12.687 | 12.757 | 13.201 | 13.082 | 12.881 | 13.201 |
| СОР | | 3.792 | 3.715 | 3.736 | 3.866 | 3.831 | 3.772 | 3.866 |

[•] VRV performance found satisfactory

4.5 Water Pumps

Table 13. Performance Analysis of RO Water Pump

| RO Water Pumps | | | | | | | | | |
|--|-------------|----------|----------|----------|--|--|--|--|--|
| Description Unit Pump -1 Pump -2 Pump -3 | | | | | | | | | |
| Design | | | | | | | | | |
| Make | | Grundfos | Grundfos | Grundfos | | | | | |
| Capacity | m³/hr | 17 | 17 | 17 | | | | | |
| Head | М | 40 | 40 | 40 | | | | | |
| Power | kW | 4 | 4 | 4 | | | | | |
| Oper | ating Param | eter | | | | | | | |
| Suction head | m | 2 | 2 | 2 | | | | | |
| Discharge head | m | 33 | 32 | 33 | | | | | |

| RO Water Pumps | | | | | | | |
|---------------------------------|-------|---------|---------|---------|--|--|--|
| Description | Unit | Pump -1 | Pump -2 | Pump -3 | | | |
| Total Head | m | 31 | 30 | 31 | | | |
| Flow rate | m³/hr | 14.1 | 13.2 | 14.2 | | | |
| Power Consumption | kW | 2.10 | 2.00 | 2.10 | | | |
| Combined efficiency | % | 55% | 52% | 55% | | | |
| Pump Efficiency (ŋ Motor=88.5%) | % | 62% | 59% | 63% | | | |

Pump performance found is satisfactory.

Table 14. Performance Analysis of Fire Water Pump

| Fire Water Pumps | | | | | | | | | |
|---------------------------------|----------------|--------------|----------------|--|--|--|--|--|--|
| Description | Unit | Hydrant Pump | Sprinkler Pump | | | | | | |
| Design | | | | | | | | | |
| Make | | Wilo | Wilo | | | | | | |
| Capacity | m³/hr | 137 | 10.8 | | | | | | |
| Head | M | 70 | 70 | | | | | | |
| Power | kW | 45 | 11 | | | | | | |
| Ope | rating Paramet | ter | | | | | | | |
| Suction head | m | 1 | 1 | | | | | | |
| Discharge head | m | 56 | 69 | | | | | | |
| Total Head | m | 55 | 68 | | | | | | |
| Flow rate | m³/hr | 132.4 | 15 | | | | | | |
| Power Consumption | kW | 37.00 | 5.00 | | | | | | |
| Combined efficiency | % | 52% | 54% | | | | | | |
| Pump Efficiency (ŋ Motor=92.5%) | % | 56% | 60% | | | | | | |

Pump performance found is satisfactory.

5.1 AHU (Air Handling Unit)

The College is air conditioned with Air Handling Units (AHU) for college air conditioning using chilled water generated and supplied from chillers.

The analysis was done to identify the measures that could be undertaken to reduce the energy consumption in AHU and also to enhance the possibilities for better controls in space and to avoid wastages by maintaining required conditions. The following parameter has studied in each unit.

- Air flow rate
- Filter face velocity
- Return temperature
- Fan power consumption
- Ambient conditions
- Supply/Return conditions at AHU

Table 15. Performance Analysis of AHU

| Description | Units | Value | Value | Value |
|---------------------|---------|----------|----------|----------|
| Location | | AHU No 1 | AHU No 2 | AHU No 3 |
| Design CFM | | 5500 | 5500 | 5500 |
| Design Power | | 3.7 | 3.7 | 3.7 |
| Air velocity | m/s | 2.68 | 2.60 | 2.66 |
| Area | m^2 | 0.96 | 0.96 | 0.96 |
| Air flow rate | m³/sec | 2.58 | 2.51 | 2.56 |
| | m³/min | 155.01 | 150.38 | 153.85 |
| | m³/hr | 9300.67 | 9023.04 | 9231.26 |
| | cfm | 5474.17 | 5310.76 | 5433.32 |
| Ambient air | | | | |
| DBT | оС | 21.00 | 25.00 | 31.00 |
| WBT | οС | 16.00 | 19.00 | 20.00 |
| RH | % | 60.00 | 57.00 | 36.00 |
| Enthalpy | kCal/kg | 10.68 | 12.88 | 13.63 |
| Density of air | kg/m³ | 1.20 | 1.18 | 1.16 |
| Supply air | | | | |
| DBT | οС | 17.00 | 18.00 | 22.00 |
| WBT | οС | 13.00 | 13.00 | 17.00 |
| RH | % | 64.00 | 57.00 | 61.00 |
| Enthalpy | kCal/kg | 8.73 | 8.73 | 11.39 |
| Cooling load on AHU | TR | 7.18 | 14.63 | 7.92 |
| Motor input power | kW | 3.20 | 3.30 | 3.00 |
| Motor efficiency | % | 0.89 | 0.89 | 0.91 |
| kW/TR | | 0.45 | 0.23 | 0.38 |

AHU performance found satisfactory

5.2 Lighting system

The College has already implemented energy efficient measures in lighting area. Illumination measured during audit at different places. Recommended value of illumination given as per National Building Code of India, 2005 clause 4.1.3, 4.1.3.2, 4.3.2 and 4.3.2.1

Table 16. Details of LED's installed in college

| Name of Item | Quantity |
|------------------------------|----------|
| Corridor round Led light 18W | 235 |
| Square Light 40 W | 57 |
| Tube light 20 W | 866 |
| Total | 1158 |

Table 17. Details of measured lux in college

| S.NO. | Location | Measured LUX Level | Recommended Lux | | | | | |
|--------------|-----------------|--------------------|-----------------|--|--|--|--|--|
| Ground Floor | | | | | | | | |
| 1 | Conference Room | 265 | 200-500 | | | | | |
| 2 | College Office | 210 | 200-500 | | | | | |
| 3 | Room No. 41 | 231 | 200-500 | | | | | |

| S.NO. | Location | Measured LUX Level | Recommended Lux |
|-------|----------------|--------------------|-----------------|
| 4 | Room No. 40 | 223 | 200-500 |
| 5 | Room No. 37 | 205 | 200-500 |
| 6 | Computer Lab 3 | 210 | 200-500 |
| 7 | Library | 231 | 200-500 |
| 8 | Staff Room 1 | 208 | 200-500 |
| 9 | Staff Room 2 | 205 | 200-500 |
| | 1st Floor | 203 | 200 300 |
| 10 | Room No. 113 | 265 | 200-500 |
| 11 | Room No. 112 | 229 | 200-500 |
| 12 | Room No. 111 | 240 | 200-500 |
| 13 | Room No. 110 | 246 | 200-500 |
| 14 | Room No. 107 | 251 | 200-500 |
| 15 | Room No. 107 | 228 | 200-500 |
| 16 | Room No. 105 | 226 | 200-500 |
| 17 | Room No. 104 | 245 | 200-500 |
| | | | |
| 18 | Room No. 117 | 235 234 | 200-500 |
| 19 | Room No. 116 | | 200-500 |
| 20 | Phsics Lab | 244 | 200-500 |
| 21 | Room No. 115 | 266 | 200-500 |
| 22 | Room No. 122 | 240 | 200-500 |
| 23 | Room No. 123 | 258 | 200-500 |
| 24 | Studio | 320 | 200-500 |
| 25 | Room No. 125 | 260 | 200-500 |
| 26 | Room No. 128 | 245 | 200-500 |
| 27 | Room No. 129 | 263 | 200-500 |
| 28 | Room No. 130 | 261 | 200-500 |
| 29 | Room No. 131 | 270 | 200-500 |
| 30 | Room No. 113 | 270 | 200-500 |
| | | 2nd Floor | |
| 31 | Room No. 219 | 272 | 200-500 |
| 32 | Room No. 221 | 276 | 200-500 |
| 33 | Room No. 222 | 279 | 200-500 |
| 34 | Room No. 223 | 272 | 200-500 |
| 35 | Room No. 224 | 296 | 200-500 |
| 36 | Room No. 227 | 298 | 200-500 |
| 37 | Room No. 228 | 288 | 200-500 |
| 38 | Room No. 229 | 293 | 200-500 |
| 39 | Room No. 217 | 288 | 200-500 |
| 40 | Room No. 218 | 286 | 200-500 |
| 41 | Room No. 215 | 289 | 200-500 |
| 42 | Room No. 216 | 279 | 200-500 |
| 43 | Room No. 201 | 289 | 200-500 |
| 44 | Room No. 202 | 295 | 200-500 |
| 45 | Room No. 204 | 268 | 200-500 |
| 46 | Room No. 205 | 270 | 200-500 |

| S.NO. | Location | Measured LUX Level | Recommended Lux |
|-------|--------------|--------------------|-----------------|
| 47 | Room No. 206 | 272 | 200-500 |
| 48 | Room No. 207 | 275 | 200-500 |
| 49 | Room No. 211 | 274 | 200-500 |
| 50 | Room No. 210 | 272 | 200-500 |
| 51 | Room No. 212 | 276 | 200-500 |
| | | 3rd Floor | |
| 52 | Room No. 324 | 310 | 200-500 |
| 53 | Room No. 326 | 310 | 200-500 |
| 54 | Room No. 327 | 299 | 200-500 |
| 55 | Room No. 328 | 283 | 200-500 |
| 56 | Room No. 329 | 310 | 200-500 |
| 57 | Room No. 332 | 295 | 200-500 |
| 58 | Room No. 333 | 310 | 200-500 |
| 59 | Room No. 334 | 296 | 200-500 |
| 60 | Auditorium | 285 | 200-500 |
| 61 | Room No. 312 | 266 | 200-500 |
| 62 | Room No. 313 | 276 | 200-500 |
| 63 | Room No. 314 | 296 | 200-500 |
| 64 | Room No. 315 | 292 | 200-500 |
| 65 | Room No. 320 | 286 | 200-500 |
| 66 | Room No. 321 | 269 | 200-500 |
| 67 | Room No. 323 | 305 | 200-500 |
| | | 4th Floor | |
| 68 | Room No. 432 | 285 | 200-500 |
| 69 | Room No. 433 | 276 | 200-500 |
| 70 | Room No. 427 | 268 | 200-500 |
| 71 | Room No. 426 | 288 | 200-500 |
| 72 | Room No. 425 | 290 | 200-500 |
| 73 | Room No. 424 | 292 | 200-500 |
| 74 | Room No. 421 | 286 | 200-500 |

Observation: Illumination found satisfactory as per standard.

5.0 Thermography

It is the science of acquisition and analysis of thermal information by using non-contact thermal imaging devices. Advantages of Thermography:

It is non-contact- uses remote sensing.

Keeps the user out of danger.

Thermal pattern can be visualized for analysis.

It is real time.

Early detect problems in electrical and mechanical systems.

Avoid measure breakdown & production loss.


The purpose of an infrared inspection is to survey a number of pieces of electrical & mechanical equipment as selected by you, the customer, with the objective of locating potential problem and determining their priority considering the high cost if electrical system & mechanical equipment fails, Infrared Thermography means substantial saving and since Thermography scansare performed while your equipment is in operation there is no lost production or machine downtime.

Following is the table for assessing the severity of electrical fault temperature and recommendation as per Bureau of Indian Standards guidelines for Infrared inspection of electrical installations (ICS 19.100).

| FAULT CATEGORY | TEMPERATURE RISE | RECOMMENDATION |
|-------------------|---------------------|-----------------------------|
| 1 | > 50°C | Immediate actionrequired |
| 2 | 25 - 50 °C | Action required |
| 3 | 10 - 25°C | Satisfactory |

 File:
 Date:
 Time:

 Ground Floor Library
 04-03-2024
 11:40:34

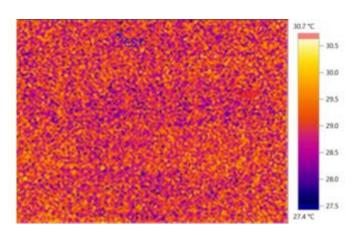




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0

Picture markings:


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.4 | 0.95 | 20.0 | - |
| Hot spot 1 | 30.7 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 GF UPS Library
 04-03-2024
 11:41:38

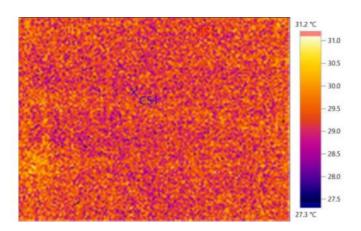




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.3 | 0.95 | 20.0 | - |
| Hot spot 1 | 31.2 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 GF Extra
 04-03-2024
 11:42:42

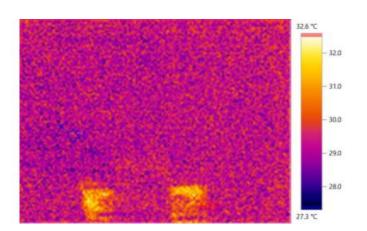




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.3 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.6 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 GF Display Operator
 04-03-2024
 11:43:58

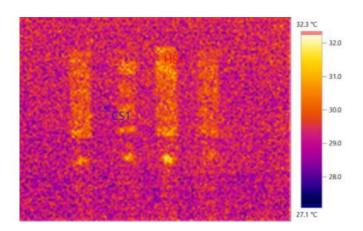




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0

Picture markings:


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.1 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.3 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 GF Display Operator
 04-03-2024
 11:45:05

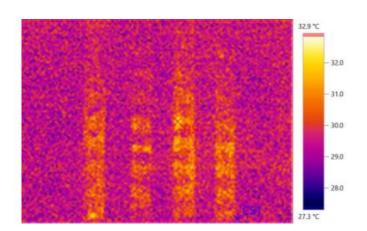




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0

Picture markings:


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.3 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.9 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 Ground Floor Panel
 04-03-2024
 11:46:00

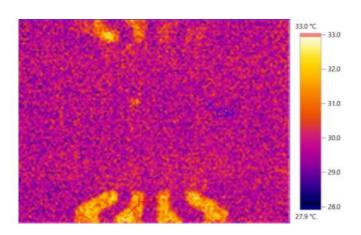




Picture parameters:


Emissivity: 0.95 **Refl. temp. [°C]:** 20.0

Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.9 | 0.95 | 20.0 | - |
| Hot spot 1 | 33.0 | 0.95 | 20.0 | - |



File:Date:Time:Lower Library HVAC VRV Panel04-03-202412:00:39

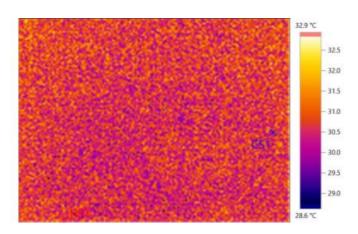




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.6 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.9 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 Ground (SP) Room Conference
 04-03-2024
 12:01:41

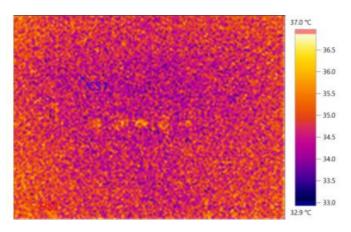




Picture parameters:


Emissivity: 0.95 **Refl. temp. [°C]:** 20.0

Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 32.9 | 0.95 | 20.0 | - |
| Hot spot 1 | 37.0 | 0.95 | 20.0 | - |



File:Date:Time:Principal Office 4th Floor04-03-202412:02:23

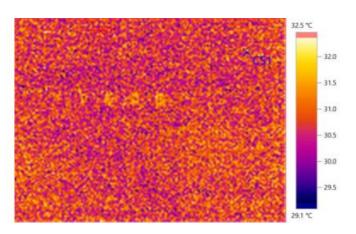




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0

Picture markings:


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.1 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.5 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 GF Computer Lab
 04-03-2024
 12:03:18

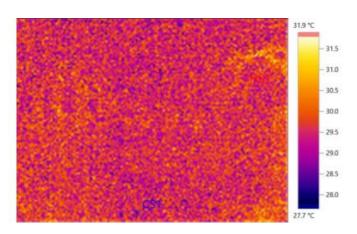




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.7 | 0.95 | 20.0 | - |
| Hot spot 1 | 31.9 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 GF Staff
 04-03-2024
 12:03:49

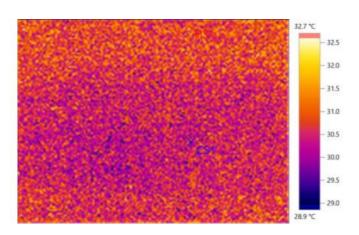




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0

Picture markings:


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.9 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.7 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 HVAC VRV Panel Display
 04-03-2024
 12:04:59

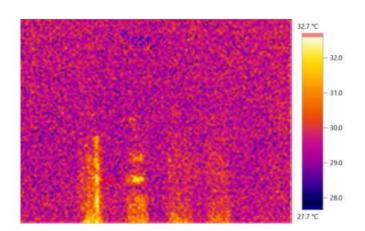




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.7 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.7 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 HVAC VRV Panel Display
 04-03-2024
 12:05:31

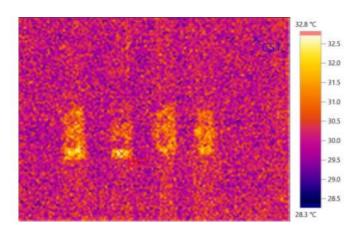




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.3 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.8 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 HVAC VRV Panel
 04-03-2024
 12:06:29

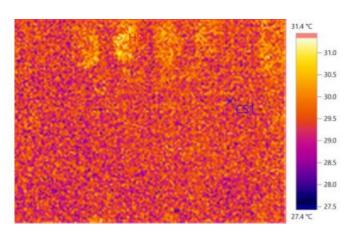




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.4 | 0.95 | 20.0 | - |
| Hot spot 1 | 31.4 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 Main Panel Display
 04-03-2024
 12:28:18

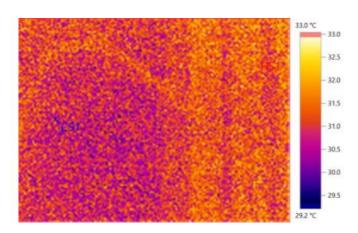




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.2 | 0.95 | 20.0 | - |
| Hot spot 1 | 33.0 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 Bus Bar 4th Floor
 04-03-2024
 12:29:52

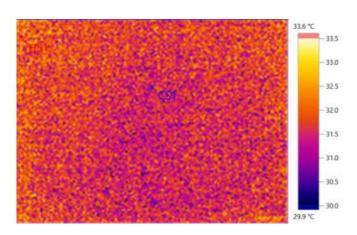




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.9 | 0.95 | 20.0 | - |
| Hot spot 1 | 33.6 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 Bas Bar 2nd Floor
 04-03-2024
 12:30:48

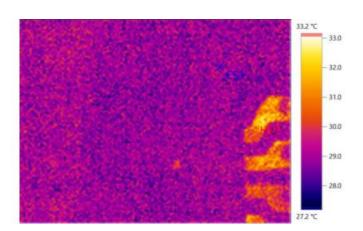




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.2 | 0.95 | 20.0 | - |
| Hot spot 1 | 33.2 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 Bas Bar 1st Floor
 04-03-2024
 12:30:57

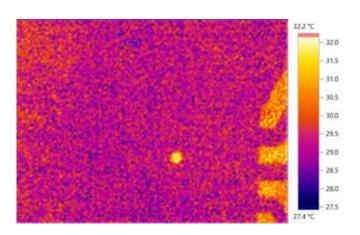




Picture parameters:


Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.4 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.2 | 0.95 | 20.0 | - |





File:Date:Time:Bas Bar Ground Floor04-03-202412:31:04

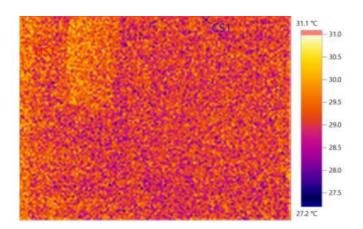




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.2 | 0.95 | 20.0 | - |
| Hot spot 1 | 31.1 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 Bas Bar AC
 04-03-2024
 12:31:12






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.9 | 0.95 | 20.0 | - |
| Hot spot 1 | 31.9 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 B.B 3rd Floor
 04-03-2024
 12:41:06

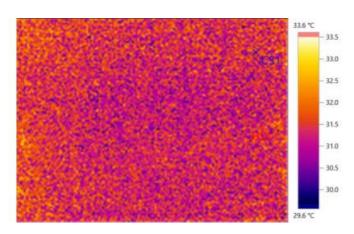




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.6 | 0.95 | 20.0 | - |
| Hot spot 1 | 33.6 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 Bus Bar Canteen Side
 04-03-2024
 12:41:17

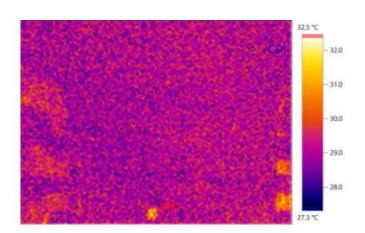




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.3 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.5 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 RIFT
 04-03-2024
 12:41:31

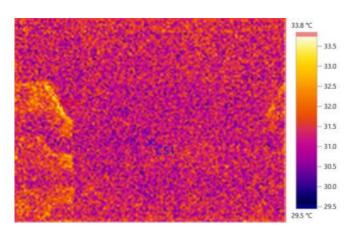




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.5 | 0.95 | 20.0 | - |
| Hot spot 1 | 33.8 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 UPS (G.F)
 04-03-2024
 12:41:48

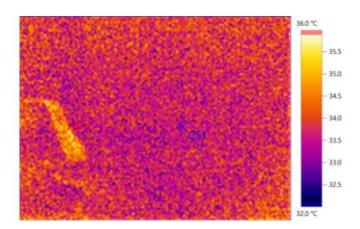




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 32.0 | 0.95 | 20.0 | - |
| Hot spot 1 | 36.0 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 Light Auditorium
 04-03-2024
 12:42:01

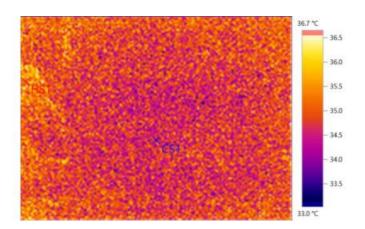




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 33.0 | 0.95 | 20.0 | - |
| Hot spot 1 | 36.7 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 AC Auditorium
 04-03-2024
 12:42:35

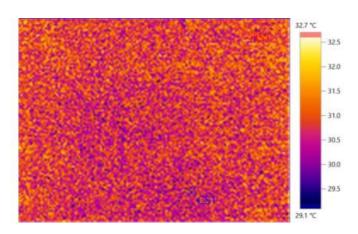




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.1 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.7 | 0.95 | 20.0 | - |






 File:
 Date:
 Time:

 Fire Motor
 04-03-2024
 12:42:51

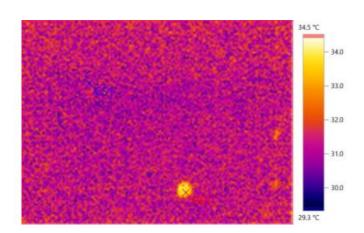




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.3 | 0.95 | 20.0 | - |
| Hot spot 1 | 34.5 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 Motor of Water
 04-03-2024
 12:43:08

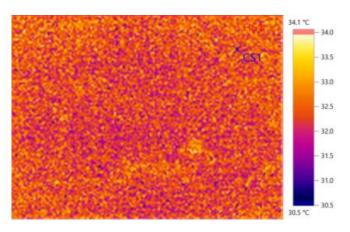




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 30.5 | 0.95 | 20.0 | - |
| Hot spot 1 | 34.1 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 Gate No-2 Ground Poll
 04-03-2024
 12:43:22

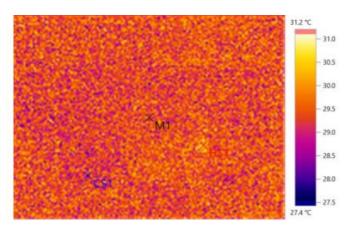




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|------------|
| Measure point 1 | 29.6 | 0.95 | 20.0 | CenterSpot |
| Cold spot 1 | 27.4 | 0.95 | 20.0 | - |
| Hot spot 1 | 31.2 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 Light Bank
 04-03-2024
 12:43:32






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.6 | 0.95 | 20.0 | - |
| Hot spot 1 | 31.3 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 BVS Bar
 04-03-2024
 12:44:33

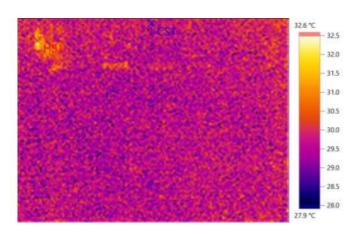




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.9 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.6 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 BVS Bar
 04-03-2024
 12:45:12






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.4 | 0.95 | 20.0 | - |
| Hot spot 1 | 34.4 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 BVS Bar
 04-03-2024
 12:45:33

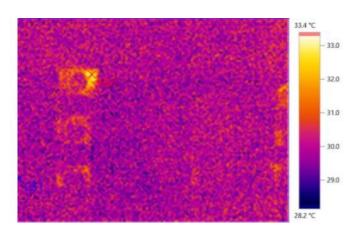




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.2 | 0.95 | 20.0 | - |
| Hot spot 1 | 33.4 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 AC DB Box
 04-03-2024
 12:46:57






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 30.3 | 0.95 | 20.0 | - |
| Hot spot 1 | 45.9 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 AC DB Box
 04-03-2024
 12:47:11






Picture parameters:


Emissivity: 0.95 **Refl. temp. [°C]:** 20.0

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 30.0 | 0.95 | 20.0 | - |
| Hot spot 1 | 40.4 | 0.95 | 20.0 | - |





File:Date:Time:First Floor Panel Display04-03-202413:01:54

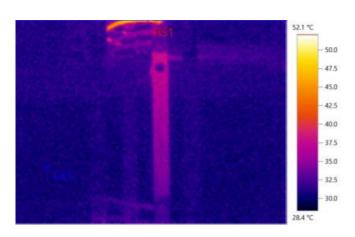




Picture parameters:


Emissivity: 0.95 **Refl. temp. [°C]:** 20.0

Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.4 | 0.95 | 20.0 | - |
| Hot spot 1 | 52.1 | 0.95 | 20.0 | - |



File:Date:Time:First Floor Panel Display04-03-202413:05:40

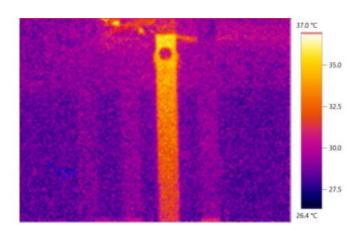




Picture parameters:


Emissivity: 0.95 **Refl. temp. [°C]:** 20.0

Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 26.4 | 0.95 | 20.0 | - |
| Hot spot 1 | 37.0 | 0.95 | 20.0 | - |



File:Date:Time:First Floor Panel Main04-03-202413:06:43






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.9 | 0.95 | 20.0 | - |
| Hot spot 1 | 33.0 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 First Floor Left Side
 04-03-2024
 13:07:26

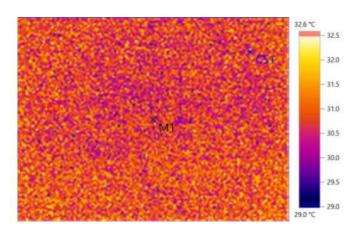




Picture parameters:


Emissivity: 0.95 **Refl. temp. [°C]:** 20.0

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|------------|
| Measure point 1 | 30.5 | 0.95 | 20.0 | CenterSpot |
| Cold spot 1 | 29.0 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.6 | 0.95 | 20.0 | - |





File:Date:Time:First Floor Panel Middle Part04-03-202413:08:13

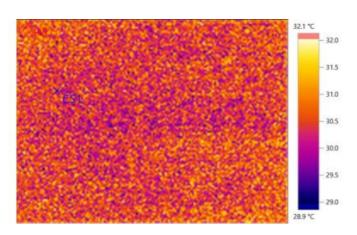




Picture parameters:


Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.9 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.1 | 0.95 | 20.0 | - |





File:Date:Time:First Floor Panel Right Side04-03-202413:08:25

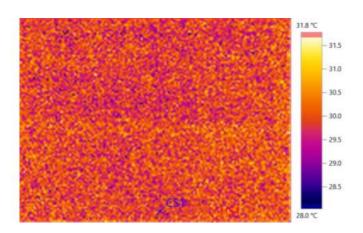




Picture parameters:


Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.0 | 0.95 | 20.0 | - |
| Hot spot 1 | 31.8 | 0.95 | 20.0 | - |



File:Date:Time:First Floor Panel Coridoor04-03-202413:08:41






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.0 | 0.95 | 20.0 | - |
| Hot spot 1 | 34.5 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 2nd Cable Alley
 04-03-2024
 13:09:01

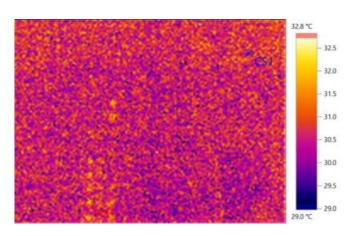




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.0 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.8 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 2nd Cable Alley
 04-03-2024
 13:09:10

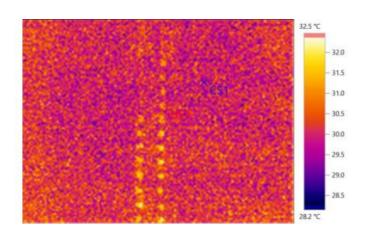




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.2 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.5 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 2nd Cable Alley
 04-03-2024
 13:09:19






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.5 | 0.95 | 20.0 | - |
| Hot spot 1 | 35.1 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 2nd Floor Display
 04-03-2024
 13:22:05






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 27.8 | 0.95 | 20.0 | - |
| Hot spot 1 | 31.9 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 2nd Floor Main Panel
 04-03-2024
 13:22:28






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.4 | 0.95 | 20.0 | - |
| Hot spot 1 | 34.1 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 2nd Floor Left MCB
 04-03-2024
 13:22:42






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.5 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.3 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 2nd Floor Middle MCB
 04-03-2024
 13:22:54

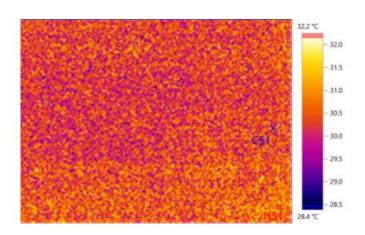




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.4 | 0.95 | 20.0 | - |
| Hot spot 1 | 32.2 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 2nd Floor Right MCB
 04-03-2024
 13:23:13

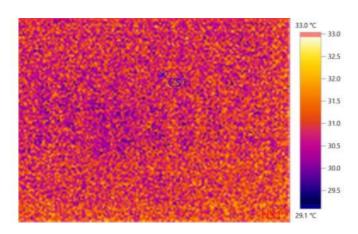




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.1 | 0.95 | 20.0 | - |
| Hot spot 1 | 33.0 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 2nd Floor Cable Alley
 04-03-2024
 13:23:38

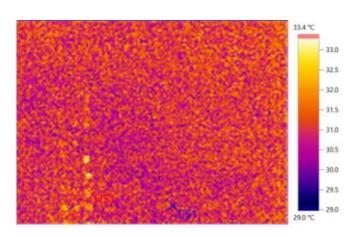




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.0 | 0.95 | 20.0 | - |
| Hot spot 1 | 33.4 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 2nd Floor Cable Alley
 04-03-2024
 13:23:48

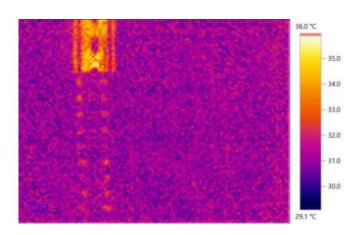




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.1 | 0.95 | 20.0 | - |
| Hot spot 1 | 36.0 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 2nd Floor Cable Alley
 04-03-2024
 13:23:57

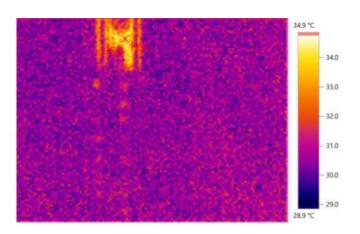




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Hot spot 1 | 34.9 | 0.95 | 20.0 | - |
| Hot spot 2 | 34.9 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 3rd Floor Display Panel
 04-03-2024
 13:38:51

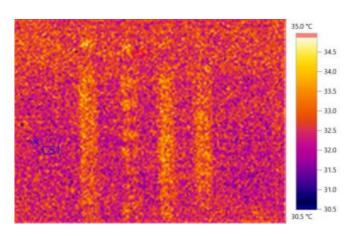




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 30.5 | 0.95 | 20.0 | - |
| Hot spot 1 | 35.0 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 3rd Floor panel
 04-03-2024
 13:39:06

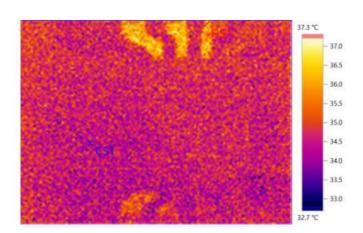




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 32.7 | 0.95 | 20.0 | - |
| Hot spot 1 | 37.3 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 3rd Floor MCB L1
 04-03-2024
 13:39:20

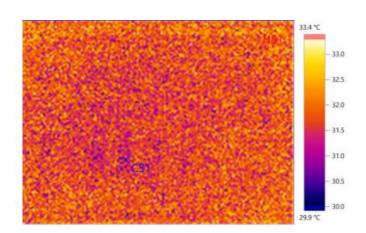




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.9 | 0.95 | 20.0 | - |
| Hot spot 1 | 33.4 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 3rd Floor MCB R2
 04-03-2024
 13:39:37

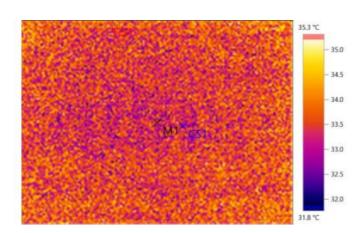




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|------------|
| Measure point 1 | 33.9 | 0.95 | 20.0 | CenterSpot |
| Cold spot 1 | 31.8 | 0.95 | 20.0 | - |
| Hot spot 1 | 35.3 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 3rd Floor M-3 MCB
 04-03-2024
 13:39:49






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 32.8 | 0.95 | 20.0 | - |
| Hot spot 1 | 36.5 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 3rd Floor Cable Alley
 04-03-2024
 13:39:58

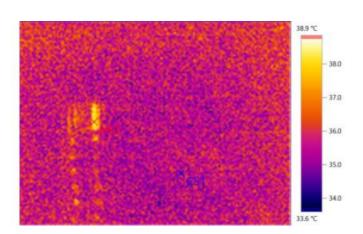




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 33.6 | 0.95 | 20.0 | - |
| Hot spot 1 | 38.9 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 3rd Floor Cable Alley
 04-03-2024
 13:40:07

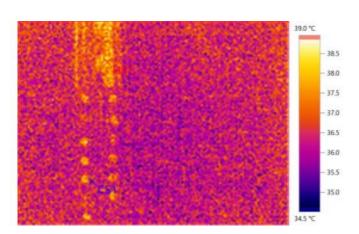




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 34.5 | 0.95 | 20.0 | - |
| Hot spot 1 | 39.0 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 3rd Floor Cable Alley
 04-03-2024
 13:40:22






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.7 | 0.95 | 20.0 | - |
| Hot spot 1 | 34.6 | 0.95 | 20.0 | - |






 File:
 Date:
 Time:

 4th Floor Display Panel
 04-03-2024
 14:22:34

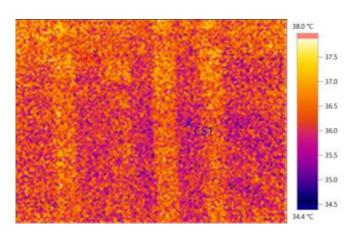




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 34.4 | 0.95 | 20.0 | - |
| Hot spot 1 | 38.0 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 4th Floor Panel main
 04-03-2024
 14:22:53

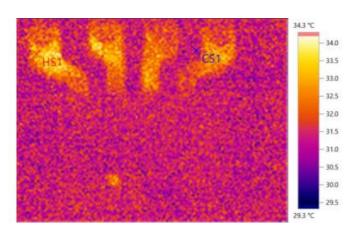




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.3 | 0.95 | 20.0 | - |
| Hot spot 1 | 34.3 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 4th Floor L-1 MCB
 04-03-2024
 14:23:10

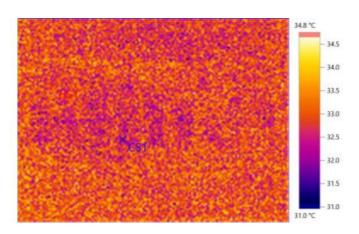




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 31.0 | 0.95 | 20.0 | - |
| Hot spot 1 | 34.8 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 4th Floor L-2 MCB
 04-03-2024
 14:23:21

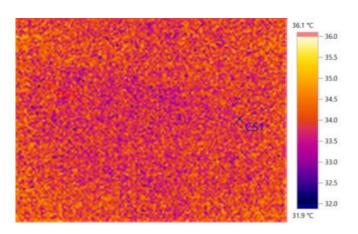




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 31.9 | 0.95 | 20.0 | - |
| Hot spot 1 | 36.1 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 4TH Floor L-3 MCB
 04-03-2024
 14:23:33

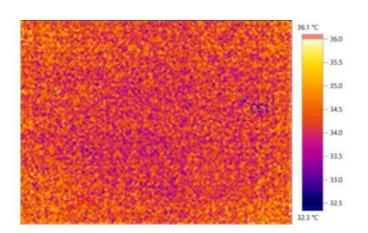




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 32.3 | 0.95 | 20.0 | - |
| Hot spot 1 | 36.1 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 4th Floor Cable Alley
 04-03-2024
 14:23:47

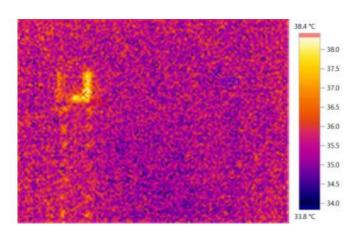




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 33.8 | 0.95 | 20.0 | - |
| Hot spot 1 | 38.4 | 0.95 | 20.0 | - |






 File:
 Date:
 Time:

 4th Floor Cable Alley
 04-03-2024
 14:23:55

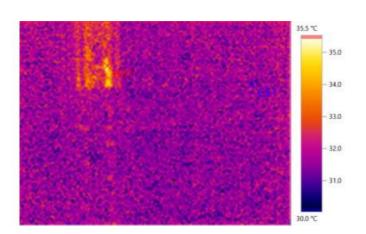




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 30.0 | 0.95 | 20.0 | - |
| Hot spot 1 | 35.5 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 4th Floor Cable Alley
 04-03-2024
 14:24:01






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.9 | 0.95 | 20.0 | - |
| Hot spot 1 | 34.5 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 Lift P.S 4th Floor
 04-03-2024
 14:25:01

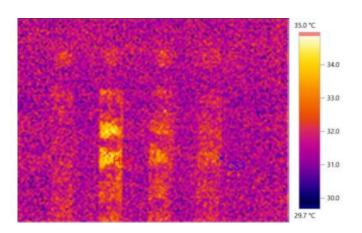




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.7 | 0.95 | 20.0 | - |
| Hot spot 1 | 35.0 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 Lift P.S 4th Floor
 04-03-2024
 14:25:32

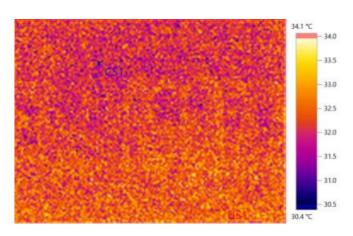




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 30.4 | 0.95 | 20.0 | - |
| Hot spot 1 | 34.1 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 Lift P.S 4th Floor
 04-03-2024
 14:25:41

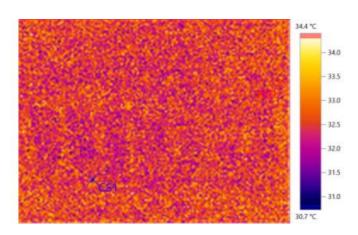




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 30.7 | 0.95 | 20.0 | - |
| Hot spot 1 | 34.4 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 4th Floor Cable Alley
 04-03-2024
 14:25:52






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 30.2 | 0.95 | 20.0 | - |
| Hot spot 1 | 33.6 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 4th Floor Cable Alley
 04-03-2024
 14:25:58

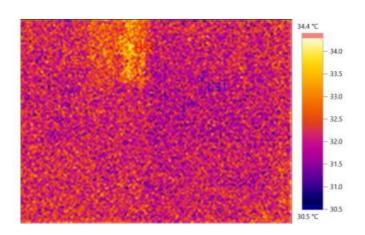




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 30.5 | 0.95 | 20.0 | - |
| Hot spot 1 | 34.4 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 LT Room College RSEB
 04-03-2024
 14:49:30






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 30.7 | 0.95 | 20.0 | - |
| Hot spot 1 | 46.3 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 LT Room College RSEB
 04-03-2024
 14:49:54

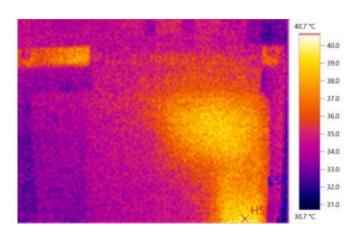




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 30.7 | 0.95 | 20.0 | - |
| Hot spot 1 | 40.7 | 0.95 | 20.0 | - |





 File:
 Date:
 Time:

 LT Room College DG-1
 04-03-2024
 14:51:43

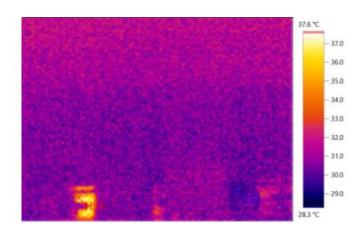




Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.3 | 0.95 | 20.0 | - |
| Hot spot 1 | 37.6 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 LT Room College DG-1
 04-03-2024
 14:51:57

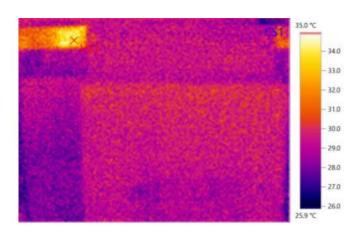




Picture parameters:


Emissivity: 0.95 **Refl. temp. [°C]:** 20.0

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 25.9 | 0.95 | 20.0 | - |
| Hot spot 1 | 35.0 | 0.95 | 20.0 | - |





File:Date:Time:LT Room College Bus Coupler04-03-202414:52:16






Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0


Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 29.7 | 0.95 | 20.0 | - |
| Hot spot 1 | 37.9 | 0.95 | 20.0 | - |



 File:
 Date:
 Time:

 LT Room College Bus Coupler
 04-03-2024
 14:52:51

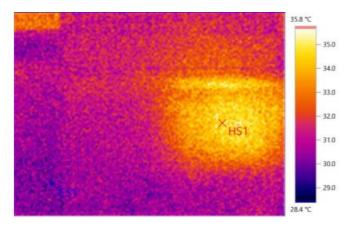



Picture parameters:

Emissivity: 0.95 **Refl. temp. [°C]:** 20.0

Picture markings:

| Measurement Objects | Temp. [°C] | Emiss. | Refl. temp. [°C] | Remarks |
|---------------------|------------|--------|------------------|---------|
| Cold spot 1 | 28.4 | 0.95 | 20.0 | - |
| Hot spot 1 | 35.8 | 0.95 | 20.0 | - |

